

# Signals and Systems

## Tutorial Sheet 1

**DR TANIA STATHAKI**


READER (ASSOCIATE PROFESSOR) IN SIGNAL PROCESSING  
IMPERIAL COLLEGE LONDON

## Problem 1

Sketch each of the following continuous-time signals, specify if the signal is periodic/non-periodic, odd/even. If the signal is periodic specify its period.

(i)  $x(t) = 2\sin(2\pi t)$


**Periodic** with period 1. **Odd** because  $\sin(-t) = -\sin(t)$ .

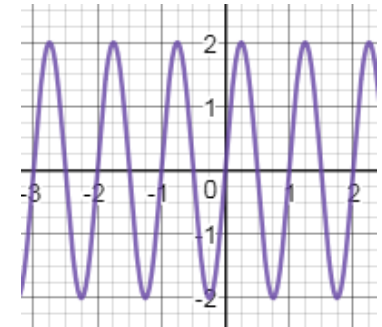

(ii)  $x(t) = \begin{cases} 3e^{-2t} & t \geq 0 \\ 0 & t < 0 \end{cases}$


This is a **causal** signal and therefore, it is **aperiodic**. A periodic system exists over the entire range of time from  $-\infty$  to  $\infty$ .

**Neither odd nor even**. An odd or even signal must have values within both the positive and the negative range.

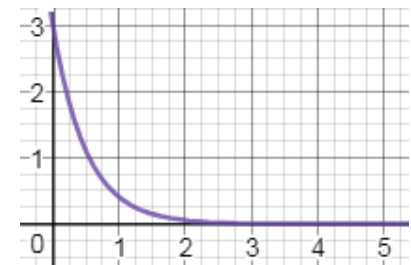

(iii)  $x(t) = \frac{1}{|t|}$

**Aperiodic**. **Even** because  $x(-t) = x(t)$ .

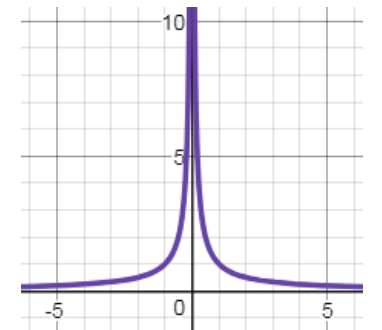

## Problem 1 cont.

- For a signal of the form  $x(t) = \sin(a\pi t) + \sin(b\pi t)$  to be periodic, the numbers  $a$  and  $b$  have to be **commensurable**.

In mathematics, two non-zero real numbers  $a$  and  $b$  are said to be commensurable if their ratio  $a/b$  is a **rational number**; otherwise  $a$  and  $b$  are called **incommensurable**. (Recall that a rational number is one that is equivalent to the ratio of two integers.)

### Proof

We test the periodicity as follows:

$$x(t + T) = \sin(a\pi(t + T)) + \sin(b\pi(t + T)) = \sin(a\pi t) \cos(a\pi T) + \cos(a\pi t) \sin(a\pi T) + \sin(b\pi t) \cos(b\pi T) + \cos(b\pi t) \sin(b\pi T)$$

$x(t) = x(t + T)$  if  $a\pi T = 2m\pi$  and  $b\pi T = 2n\pi$ ,  $m, n$  integers. Therefore,

$$\frac{a}{b} = \frac{m}{n}$$

Hence, the numbers  $a$  and  $b$  have to be commensurable.

## Problem 1 cont.

Based on the analysis of the previous slide we have:

$$(iv) \quad x(t) = \sin\left(\frac{2}{5}\pi t\right) + \sin\left(\frac{2}{3}\pi t\right) \quad a = \frac{2}{5}, \quad b = \frac{2}{3}, \quad \frac{a}{b} = \frac{3}{5} = \frac{m}{n}.$$


Hence, the numbers  $a$  and  $b$  are commensurable and the signal is **periodic**.

$$a\pi T = 2m\pi \Rightarrow T = \frac{2m}{a} = 5m$$

$$b\pi T = 2n\pi \Rightarrow T = \frac{2n}{b} = 3n.$$

Therefore  $5m = 3n \Rightarrow m = 3, n = 5, T = 15$ .


Furthermore, it is **odd**.

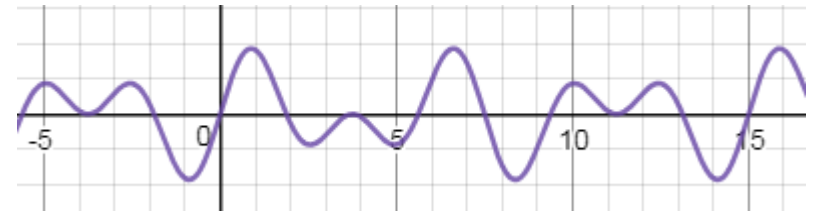

$$(v) \quad x(t) = \sin(2\pi t) + \sin(\sqrt{2}\pi t) \quad a = 2, \quad b = \sqrt{2}, \quad \frac{a}{b} = \sqrt{2} \neq \frac{m}{n}.$$

Hence, the numbers  $a$  and  $b$  are not commensurable and the signal is **aperiodic** (although it doesn't look like in the figure!).

Furthermore, it is **odd**.

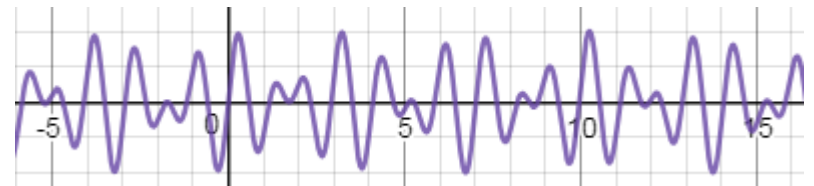



## Problem 2

Sketch the signal:

$$x(t) = \begin{cases} 1 - t & 0 \leq t \leq 1 \\ 0 & \text{otherwise} \end{cases}$$

Now sketch each of the following and describe briefly in words how each of the signals can be derived from the original signal  $x(t)$ .

$$(i) \quad x(t + 3) = \begin{cases} 1 - (t + 3) = -t - 2 & 0 \leq t + 3 \leq 1 \Rightarrow -3 \leq t \leq -2 \\ 0 & \text{otherwise} \end{cases}$$

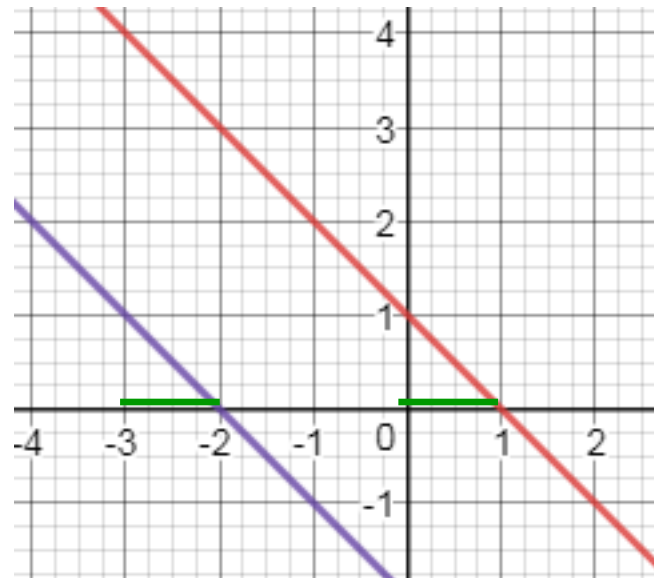


## Problem 2 cont.

Sketch the signal:

$$x(t) = \begin{cases} 1 - t & 0 \leq t \leq 1 \\ 0 & \text{otherwise} \end{cases}$$

$$(ii) \quad x(t/3) = \begin{cases} 1 - t/3 & 0 \leq t/3 \leq 1 \Rightarrow 0 \leq t \leq 3 \\ 0 & \text{otherwise} \end{cases}$$

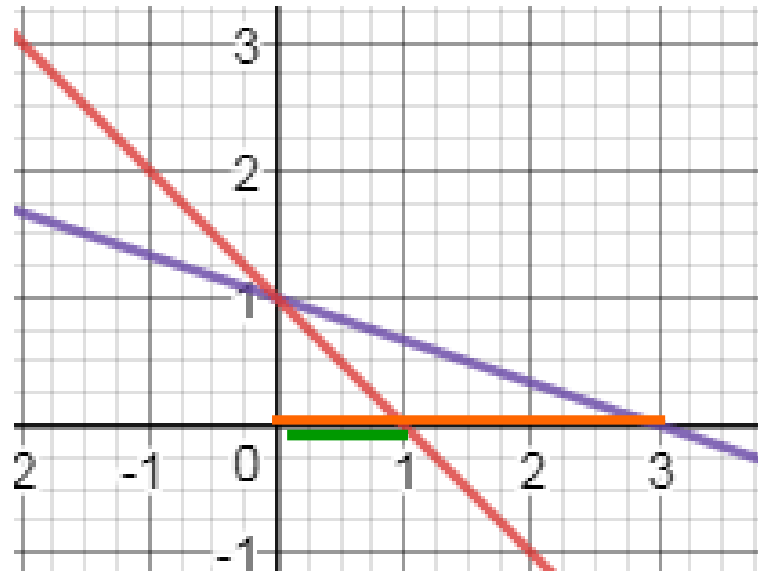


## Problem 2 cont.

Sketch the signal:

$$x(t) = \begin{cases} 1 - t & 0 \leq t \leq 1 \\ 0 & \text{otherwise} \end{cases}$$

(iii)

$$x\left(\frac{t}{3} + 1\right) = \begin{cases} 1 - \left(\frac{t}{3} + 1\right) = -\frac{t}{3} & 0 \leq \frac{t}{3} + 1 \leq 1 \Rightarrow -1 \leq \frac{t}{3} \leq 0 \Rightarrow -3 \leq t \leq 0 \\ 0 & \text{otherwise} \end{cases}$$

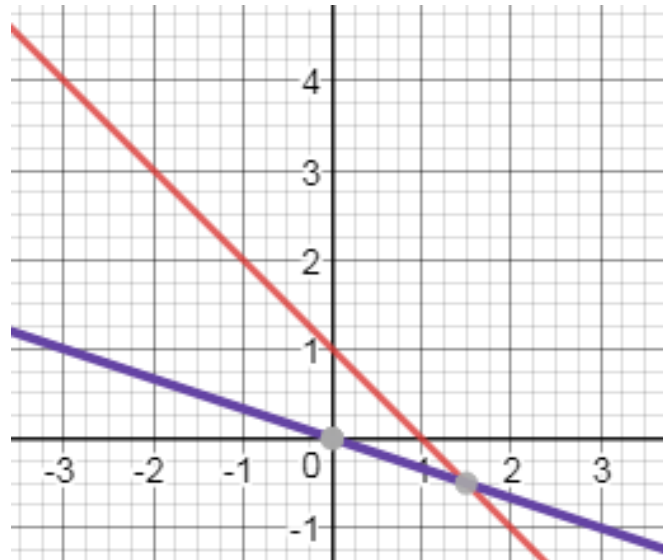


## Problem 2 cont.

Sketch the signal:

$$x(t) = \begin{cases} 1 - t & 0 \leq t \leq 1 \\ 0 & \text{otherwise} \end{cases}$$

(iv)

$$\begin{cases} x(-t + 2) = \\ \begin{cases} 1 - (-t + 2) = t - 1 & 0 \leq -t + 2 \leq 1 \Rightarrow -1 \leq t - 2 \leq 0 \Rightarrow 1 \leq t \leq 2 \\ 0 & \text{otherwise} \end{cases} \end{cases}$$

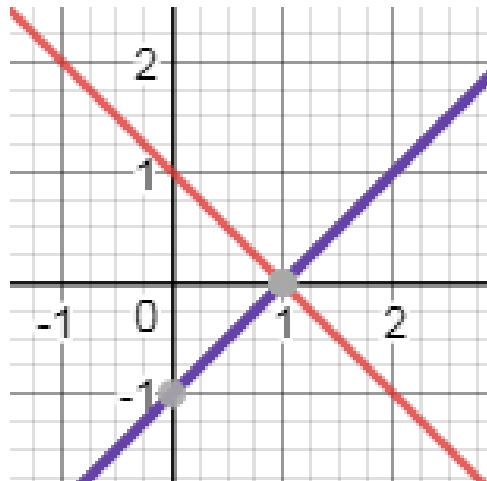




## Problem 2 cont.

Sketch the signal:

$$x(t) = \begin{cases} 1 - t & 0 \leq t \leq 1 \\ 0 & \text{otherwise} \end{cases}$$

(v)

$$x(-2t + 1) = \begin{cases} 1 - (-2t + 1) = 2t & 0 \leq -2t + 1 \leq 1 \Rightarrow -1 \leq -2t \leq 0 \Rightarrow 0 \leq t \leq \frac{1}{2} \\ 0 & \text{otherwise} \end{cases}$$

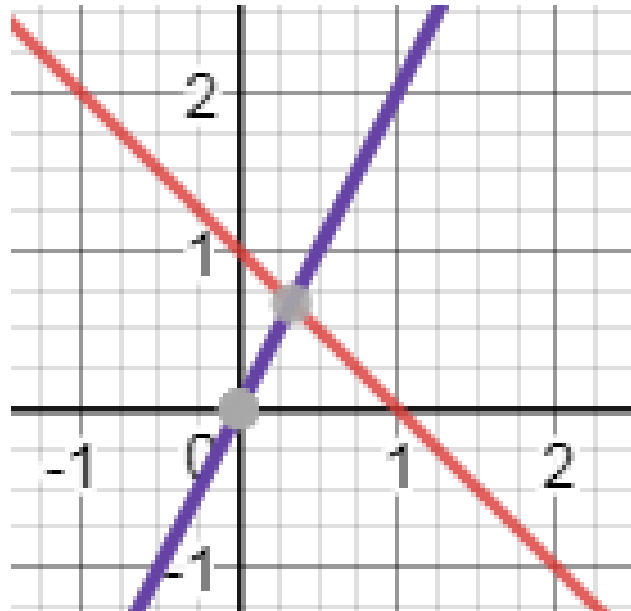

## Problem 3

Sketch each of the following discrete-time signals, specify if the signal is periodic/non-periodic, odd/even. If the signal is periodic specify its period.

(i)  $x[n] = \cos(n\pi)$

**Periodic** and **even**.  $\cos(n + T)\pi = \cos(n\pi)\cos(T\pi) - \sin(n\pi)\sin(T\pi)$


$$\cos(T\pi) = 1, \sin(T\pi) = 0 \Rightarrow T = 2.$$

Signal form is obvious.

(ii)  $x[n] = \begin{cases} 0.5^{-n} & n \leq 0 \\ 0 & n > 0 \end{cases}$

**Aperiodic. Neither odd nor even.**

The continuous version is depicted on the right.

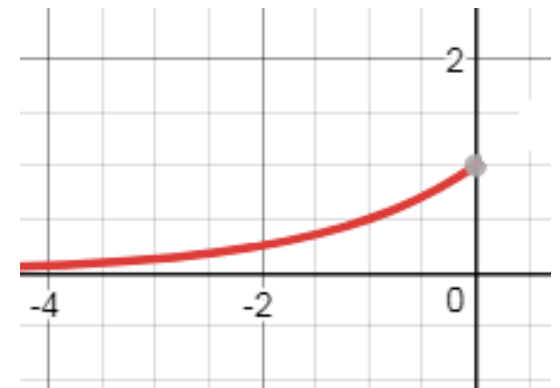

## Problem 3 cont.

- (iii) What is the maximum possible frequency of the discrete exponential  $e^{j\omega_0 n}$ ? Compare this result with the case  $e^{j\omega_0 t}$ .

**This question will be solved later, when we deal with the Fourier transform decompositions for discrete signals.**

## Problem 4


Consider the rectangular function:

$$\Pi(t) = \begin{cases} 1 & |t| < 1/2 \\ 1/2 & |t| = 1/2 \\ 0 & \text{otherwise} \end{cases}$$

(i) Sketch  $x(t) = \sum_{k=0}^1 \Pi(t - k)$

$$\Pi(t - 1) = \begin{cases} 1 & |t - 1| < \frac{1}{2} \Rightarrow -\frac{1}{2} < t - 1 < \frac{1}{2} \Rightarrow \frac{1}{2} < t < \frac{3}{2} \\ 1/2 & t = \frac{1}{2}, \frac{3}{2} \\ 0 & \text{otherwise} \end{cases}$$

$$x(t) = \sum_{k=0}^1 \Pi(t - k) = \begin{cases} 1 & -\frac{1}{2} < t < \frac{3}{2} \\ 1/2 & t = -\frac{1}{2}, \frac{3}{2} \\ 0 & \text{otherwise} \end{cases}$$

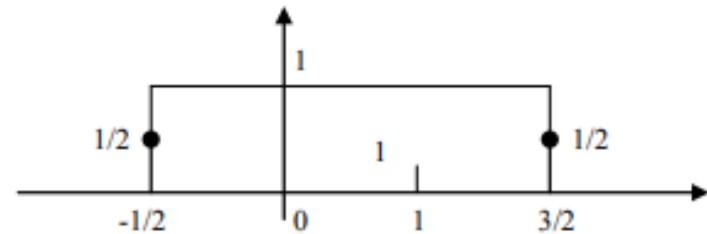

(ii) Sketch  $x(t) = \sum_{-\infty}^{\infty} \Pi(t - k)$ . It is very easy to spot that  $x(t) = 1$ .

## Problem 5

Consider a discrete-time signal  $x[n]$ , fed as input into a system. The system produces the discrete-time output  $y[n]$  such that

$$y[n] = \begin{cases} x[n] & n \text{ even} \\ 0 & n \text{ odd} \end{cases}$$

- (i) Is the system described above memoryless? Explain  
It is **memoryless** since the output at time instant  $n$  depends on the input only at time instant  $n$  and not past or future time instants.
- (ii) Is the system described above causal? Explain.  
It is **causal** since the output at time instant  $n$  depends on the input only at time instant  $n$  and not future time instants.
- (iii) Are causal systems in general memoryless? Explain.  
No. If the output at time instant  $n$  depends on the input at time instant  $n$  **and** past time instants the system is causal but not memoryless.

## Problem 5 cont.

(iv) Is the system linear and time-invariant? Explain.

The output can be written in a compact form as a function of the input as:

$$y[n] = \frac{x[n] + (-1)^n x[n]}{2}$$

We see that if the input signal  $x_1[n]$  produces an output signal  $y_1[n]$  and the input signal  $x_2[n]$  produces an output signal  $y_2[n]$  then the input signal  $a_1 x_1[n] + a_2 x_2[n]$  produces the output

$$y_3[n] = \frac{(a_1 x_1[n] + a_2 x_2[n]) + (-1)^n (a_1 x_1[n] + a_2 x_2[n])}{2} = a_1 y_1[n] + a_2 y_2[n].$$

Therefore, the system is **linear**.

However, if the input signal  $x[n]$  produces an output signal  $y[n]$  then the input signal  $x[n - n_o]$  produces the output  $y_1[n] = \frac{x[n - n_o] + (-1)^n x[n - n_o]}{2}$ .

We see that  $y[n - n_o] = \frac{x[n - n_o] + (-1)^{n - n_o} x[n - n_o]}{2} \neq y_1[n]$

Therefore, the system is **time varying**.

## Problem 6

State with a brief explanation if the following systems are linear/non-linear, causal/non-causal, time invariant/time-varying.

(i)  $y[n] = x[n] - x[n - 1]$

We see that if the input signal  $x_1[n]$  produces an output signal  $y_1[n]$  and the input signal  $x_2[n]$  produces an output signal  $y_2[n]$  then the input signal  $a_1x_1[n] + a_2x_2[n]$  produces the output

$$y_3[n] =$$

$$a_1x_1[n] + a_2x_2[n] - a_1x_1[n - 1] - a_2x_2[n - 1] = a_1y_1[n] + a_2y_2[n]$$

Therefore, the system is **linear**.

If the input signal  $x[n]$  produces an output signal  $y[n]$  then the input signal  $x[n - n_o]$  produces the output  $y_1[n] = x[n - n_o] - x[n - 1 - n_o]$

We see that  $y[n - n_o] = y_1[n]$

Therefore, the system is **time invariant**.

The system is **causal** since the output does not depend on future inputs.

## Problem 6 cont.

(ii)  $y[n] = \text{sgn}(x[n])$

We see that if the input signal  $x_1[n]$  produces an output signal  $y_1[n]$  and the input signal  $x_2[n]$  produces an output signal  $y_2[n]$  then the input signal  $a_1x_1[n] + a_2x_2[n]$  produces the output

$$y_3[n] = \text{sgn}(a_1x_1[n] + a_2x_2[n]) \neq a_1y_1[n] + a_2y_2[n]$$

Therefore, the system is **non-linear**.

However, if the input signal  $x[n]$  produces an output signal  $y[n]$  then the input signal  $x[n - n_o]$  produces the output  $y_1[n] = \text{sgn}(x[n - n_o])$ .

We see that  $y[n - n_o] = \text{sgn}(x[n - n_o]) = y_1[n]$ .

Therefore, the system is **time invariant**.

The system is **causal** since the output does not depend on future inputs.



## Problem 6 cont.

(iii)  $y[n] = n^2 x[n + 2]$

The input  $x_1[n]$  produces an output  $y_1[n]$ .

The input  $x_2[n]$  produces an output  $y_2[n]$ .

The input  $a_1 x_1[n] + a_2 x_2[n]$  produces the output

$$y_3[n] = n^2 (a_1 x_1[n + 2] + a_2 x_2[n + 2]) = a_1 y_1[n] + a_2 y_2[n]$$

Therefore, the system is **linear**.

However, if the input signal  $x[n]$  produces an output signal  $y[n]$  then the input signal  $x[n - n_o]$  produces the output  $y_1[n] = n^2 x[n - n_o + 2]$ .

We see that  $y[n - n_o] = (n - n_o)^2 x[n - n_o + 2] \neq y_1[n]$

Therefore, the system is **time varying**.

The system is **non-causal** since if  $n > 0$  then  $n + 2 > n$  which shows that the output requires future values of the input in order to be calculated.

## Problem 7

State with a brief explanation if the following systems are linear/non-linear, causal/non-causal, time invariant/time-varying.  $x(t)$  is the input and  $y(t)$  is the output.

(i)  $y(t) = x(t)\cos(2\pi f_0 t + \phi)$

The input  $x_1(t)$  produces the output  $y_1(t) = x_1(t)\cos(2\pi f_0 t + \phi)$ .

The input  $x_2(t)$  produces the output  $y_2(t) = x_2(t)\cos(2\pi f_0 t + \phi)$ .

The linear combination  $a_1 x_1(t) + a_2 x_2(t)$  produces the output  $y_3(t) = (a_1 x_1(t) + a_2 x_2(t))\cos(2\pi f_0 t + \phi) = a_1 y_1(t) + a_2 y_2(t)$

Therefore, the system is **linear**.

If the input  $x(t)$  produces an output  $y(t)$ , then the input  $x(t - t_o)$  produces the output  $y_1(t) = x(t - t_o)\cos(2\pi f_0 t + \phi)$

We see that  $y(t - t_o) = x(t - t_o)\cos(2\pi f_0(t - t_o) + \phi) \neq y_1(t)$

Therefore, the system is **time-varying**.

The system is **causal** since the output does not depend on future inputs.

## Problem 7 cont.

(ii)  $y(t) = A\cos(2\pi f_0 t + x(t))$

The input  $x_1(t)$  produces the output  $y_1(t) = A\cos(2\pi f_0 t + x_1(t))$ .

The input  $x_2(t)$  produces the output  $y_2(t) = A\cos(2\pi f_0 t + x_2(t))$ .

The linear combination  $a_1 x_1(t) + a_2 x_2(t)$  produces the output  
 $y_3(t) = A\cos(2\pi f_0 t + a_1 x_1(t) + a_2 x_2(t)) \neq a_1 y_1(t) + a_2 y_2(t)$

Therefore, the system is **non-linear**.

If the input  $x(t)$  produces an output  $y(t)$ , then the input  $x(t - t_o)$  produces the output  $y_1(t) = A\cos(2\pi f_0 t + x(t - t_o))$ .

We see that  $y(t - t_o) = A\cos(2\pi f_0(t - t_o) + x(t - t_o)) \neq y_1(t)$

Therefore, the system is **time-varying**.

The system is **causal** since the output does not depend on future inputs.

## Problem 7 cont.

(iii)  $y(t) = \int_{-\infty}^t x(\delta)d\delta$

The input  $x_1(t)$  produces the output  $y_1(t) = \int_{-\infty}^t x_1(\delta)d\delta$ .

The input  $x_2(t)$  produces the output  $y_2(t) = \int_{-\infty}^t x_2(\delta)d\delta$ .

The linear combination  $a_1x_1(t) + a_2x_2(t)$  produces the output

$$y_3(t) = \int_{-\infty}^t (a_1x_1(\delta) + a_2x_2(\delta))d\delta = a_1y_1(t) + a_2y_2(t)$$

Therefore, the system is **linear**.

If the input  $x(t)$  produces an output  $y(t)$ , then the input  $x(t - t_o)$

produces the output  $y_1(t) = \int_{-\infty}^t x_2(\delta - t_o)d\delta$ .

Replace  $\delta - t_o = \tau \Rightarrow y_1(t) = \int_{-\infty}^{t-t_o} x_2(\tau)d\tau$

We see that  $y(t - t_o) = \int_{-\infty}^{t-t_o} x(\delta)d\delta = y_1(t)$

Therefore, the system is **time-invariant**.

The system is **causal** since the output does not depend on future inputs.

## Problem 7 cont.

(iv)  $y(t) = x(2t)$

The input  $x_1(t)$  produces the output  $y_1(t) = x_1(2t)$ .

The input  $x_2(t)$  produces the output  $y_2(t) = x_2(2t)$ .

The linear combination  $a_1x_1(t) + a_2x_2(t)$  produces the output

$$y_3(t) = a_1x_1(2t) + a_2x_2(2t) = a_1y_1(t) + a_2y_2(t)$$

Therefore, the system is **linear**.

If the input  $x(t)$  produces an output  $y(t)$ , then the input  $x(t - t_o)$  produces the output  $y_1(t) = x(2t - t_o)$ .

We see that  $y(t - t_o) = x(2(t - t_o)) \neq y_1(t)$

Therefore, the system is **time-varying**.

The system is **non-causal** since if  $t > 0$  then  $2t > t$  which shows that the output requires future values of the input in order to be calculated.

## Problem 7 cont.

(iv)  $y(t) = x(-t)$

The input  $x_1(t)$  produces the output  $y_1(t) = x_1(-t)$ .

The input  $x_2(t)$  produces the output  $y_2(t) = x_2(-t)$ .

The linear combination  $a_1x_1(t) + a_2x_2(t)$  produces the output

$$y_3(t) = a_1x_1(-t) + a_2x_2(-t) = a_1y_1(t) + a_2y_2(t)$$

Therefore, the system is **linear**.

If the input  $x(t)$  produces an output  $y(t)$ , then the input  $x(t - t_o)$  produces the output  $y_1(t) = x(-t - t_o)$ .

We see that  $y(t - t_o) = x(-(t - t_o)) = x(-t + t_o) \neq y_1(t)$ .

Therefore, the system is **time-varying**.

The system is **non-causal** since if  $t < 0$  then  $-t > t$  which shows that the output requires future values of the input in order to be calculated.