

Digital Image Processing

Spatial Filters in Image Processing

DR TANIA STATHAKI

READER (ASSOCIATE PROFESSOR) IN SIGNAL PROCESSING
IMPERIAL COLLEGE LONDON

Spatial filters for image enhancement

- Spatial filters called spatial masks are used for specific operations on the image. Popular filters are the following:
 - Low pass filters
 - High pass filters
 - High boost filters
 - Others

Image averaging in the case of many realizations

- We have M different noisy images:

$$g_i(x, y) = f(x, y) + n_i(x, y), i = 0, \dots, M - 1$$

- Noise realizations are zero mean and white with the same variance, i.e.,
 $E\{n_i(x, y)\} = 0$

$$R_{n_i}[k, l] = E\{n_i(x, y)n_i(x + k, y + l)\} = \sigma_{n_i}^2 \delta[k, l] = \sigma_n^2 \delta[k, l]$$

- We define a new image which is the average

$$\bar{g}(x, y) = \frac{1}{M} \sum_{i=0}^{M-1} g_i(x, y) = f(x, y) + \frac{1}{M} \sum_{i=0}^{M-1} n_i(x, y)$$

- Notice that average is calculated across realizations.
- Problem:** Find the mean and variance of the new image $\bar{g}(x, y)$.

$$\blacksquare E\{\bar{g}(x, y)\} = E\left\{\frac{1}{M} \sum_{i=0}^{M-1} g_i(x, y)\right\} = \frac{1}{M} \sum_{i=0}^{M-1} E\{g_i(x, y)\} = f(x, y)$$


$$\blacksquare \sigma_{\bar{g}(x, y)}^2 = \sigma_{f(x, y)}^2 + \frac{1}{M} \sigma_{n(x, y)}^2 = 0 + \frac{1}{M} \sigma_{n(x, y)}^2 = \frac{1}{M} \sigma_{n(x, y)}^2$$

$$\blacksquare \sigma_{f(x, y)}^2: \text{variance of pixel } (x, y) \text{ is } 0$$


Example: Image Averaging




1 image

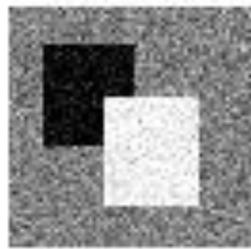


2

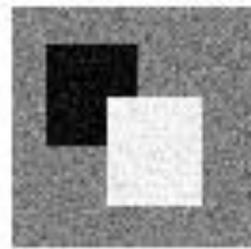

5

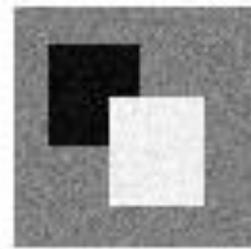


10

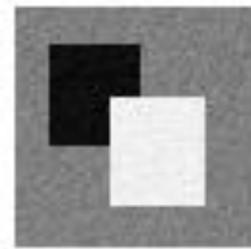


20


Example: Image Averaging

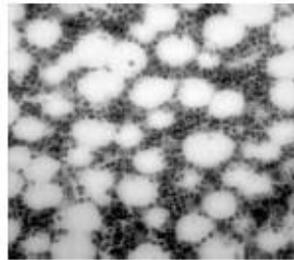


Noise-free
Image

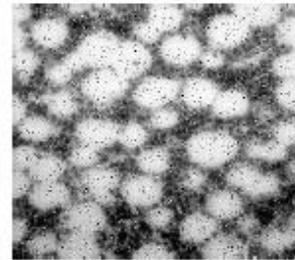


Noisy Image
Noise Variance = 0.05

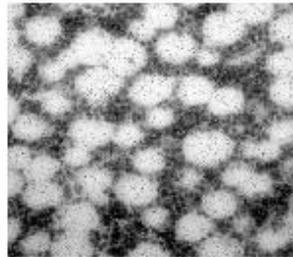


$M=2$

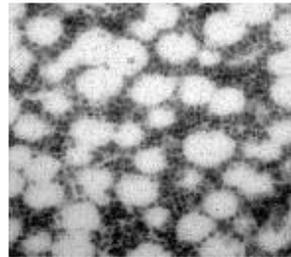


$M=5$

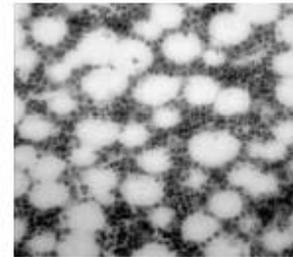


$M=10$

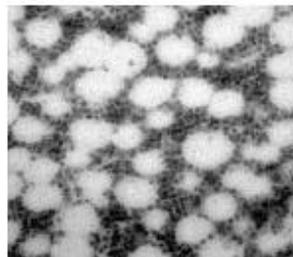

$M=25$

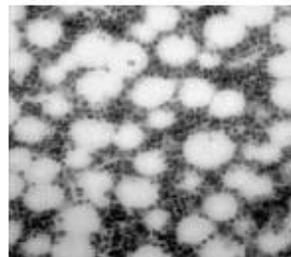


$M=50$


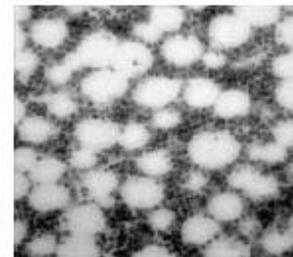


$M=100$

Example: Image Averaging


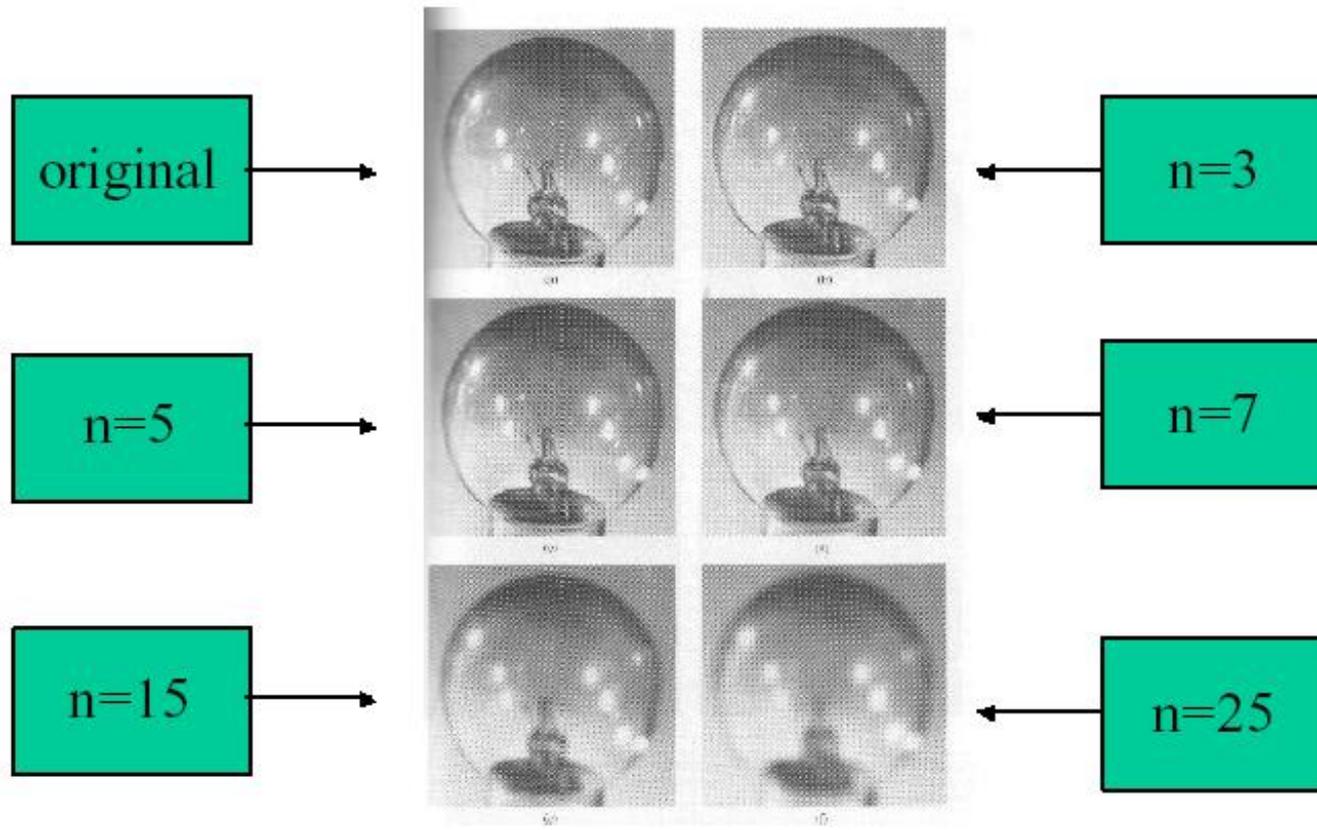


Spatial masks

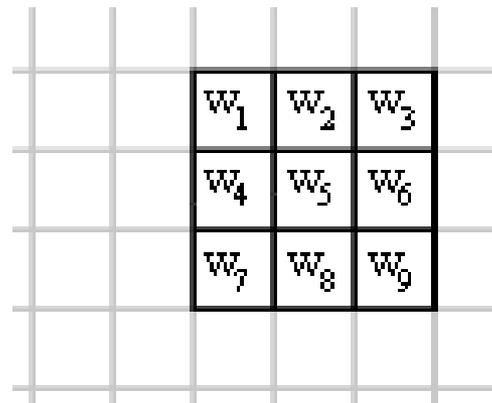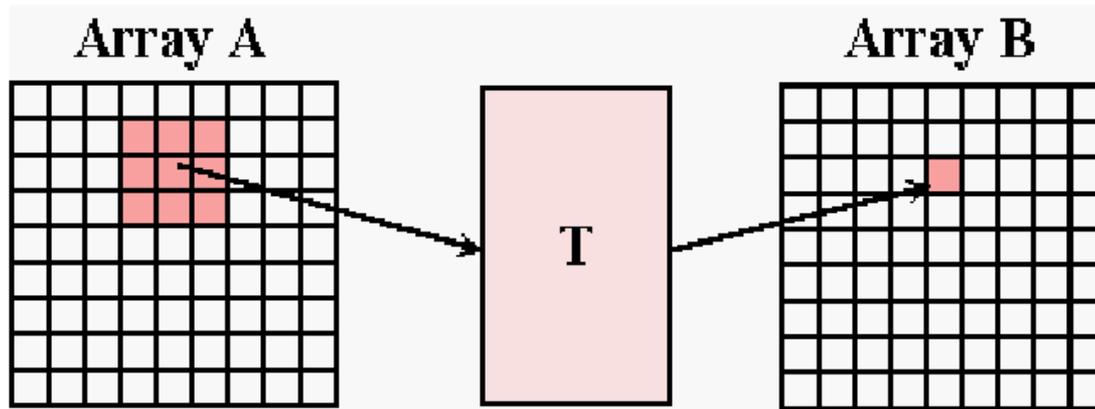


Frequency response of 1D and 2D local averaging spatial masks


- Recall that a rectangular function in the spatial domain has a sinc function frequency response.

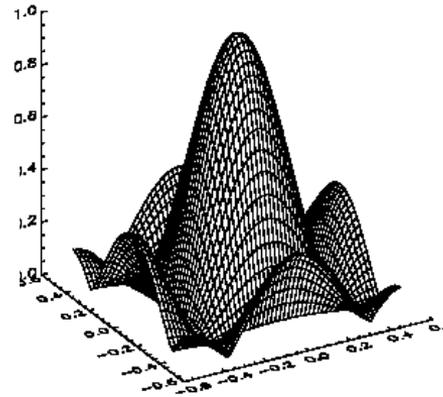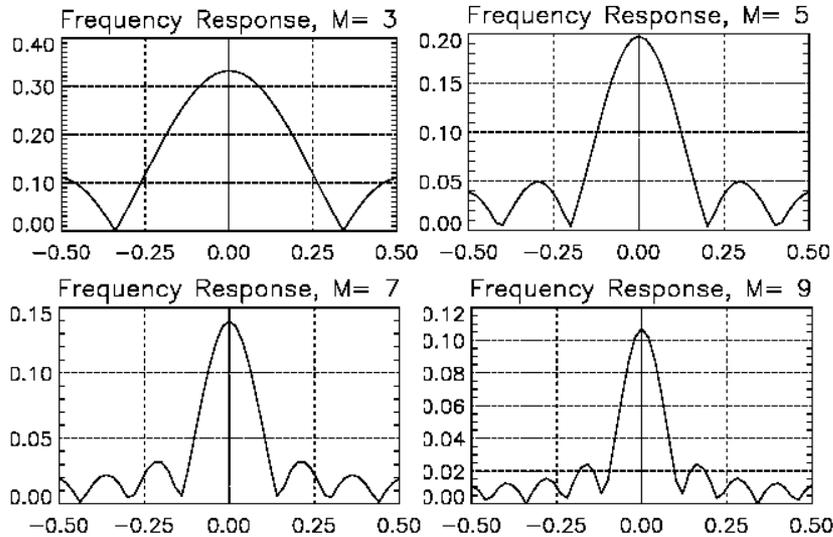


Frequency Response for M=3

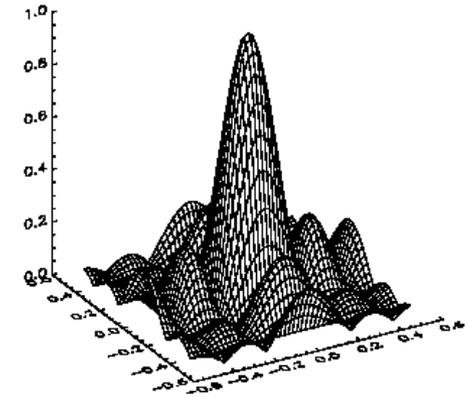

Frequency Response for M=5

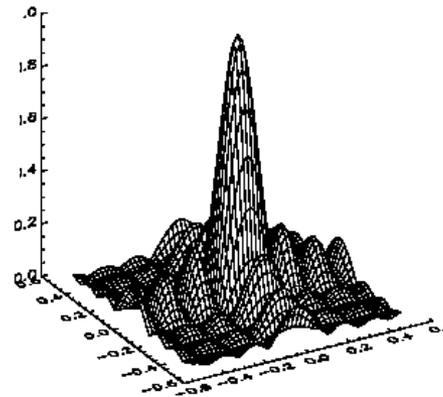



Frequency Response for M=7

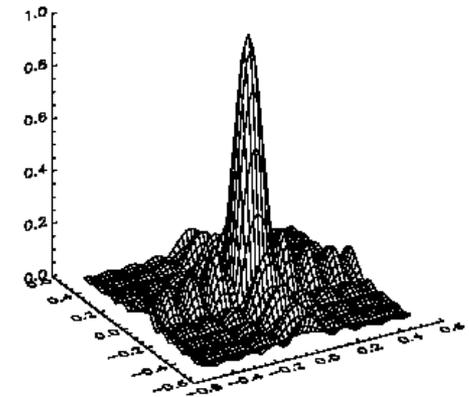


Frequency Response for M=9

Weighted local averaging spatial masks

$$\frac{1}{25} \times \begin{array}{|c|c|c|c|c|} \hline 1 & 1 & 2 & 1 & 1 \\ \hline 1 & 2 & 3 & 2 & 1 \\ \hline 2 & 3 & 4 & 3 & 2 \\ \hline 1 & 2 & 3 & 2 & 1 \\ \hline 1 & 1 & 2 & 1 & 1 \\ \hline \end{array}$$

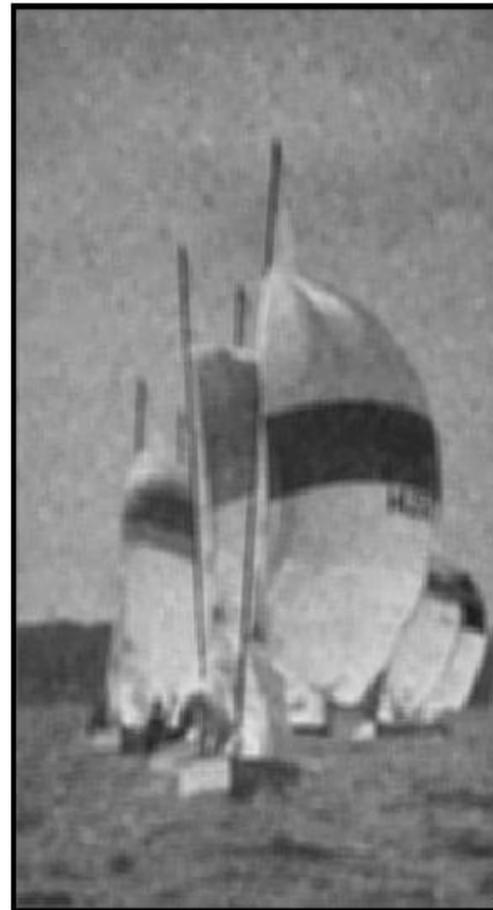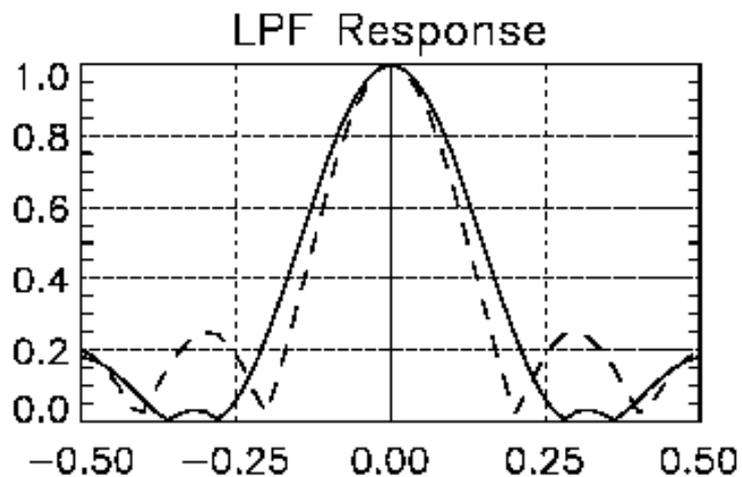

Averaging Filter

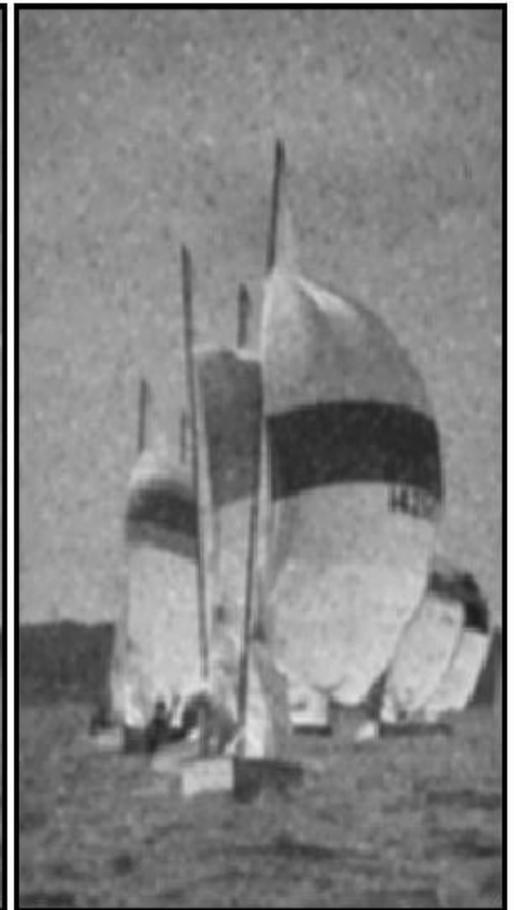


Lowpass Filter


Example of local image averaging




Original Image

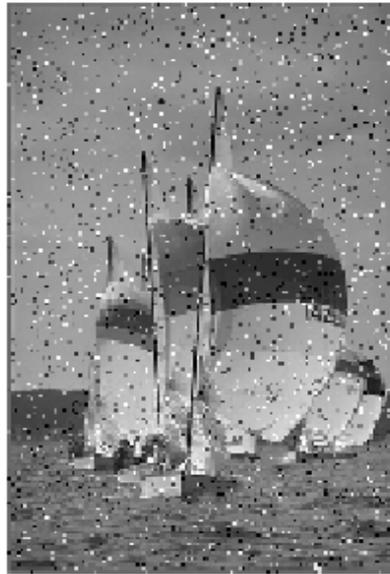

Noisy Image

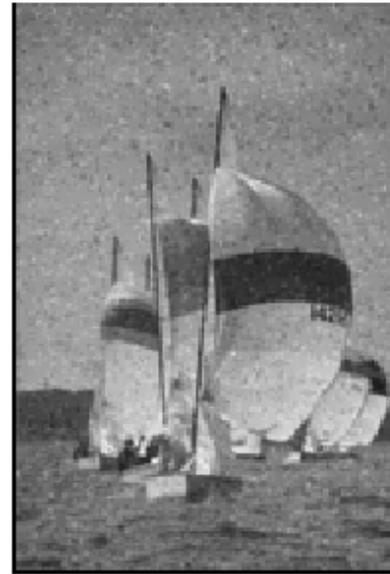

3×3 smoothing

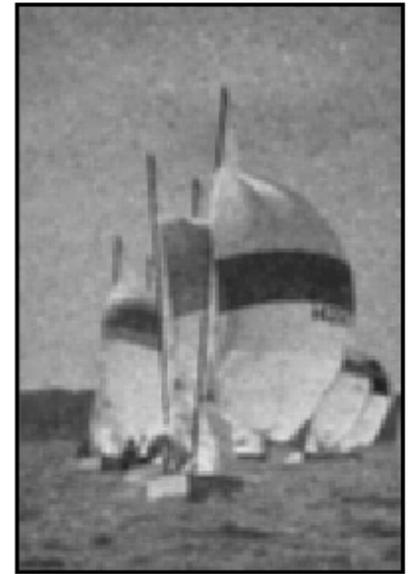

5×5 smoothing

A noiseless image and its noisy version



Original Lena image



Lena image with 10db noise

and some denoising



3×3 averaging mask



5×5 averaging mask

Median filtering

123	125	126	130	140
122	124	126	127	135
118	120	150	125	134
119	115	119	123	133
111	116	110	120	130

Neighbourhood values:


115, 119, 120, 123, 124,
125, 126, 127, 150

Median value: 124

Example of median filtering



Original

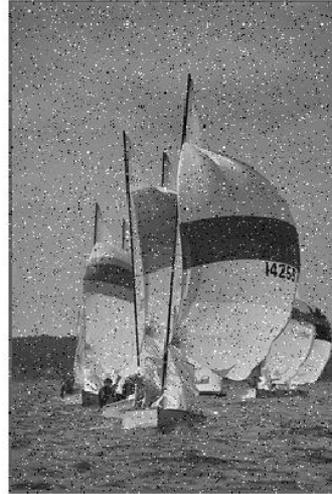

Original with Noise



After N=3 Median Filter




After N=5 Median Filter


Comparison of local smoothing and median filtering



Median versus local averaging filter response around a local step edge

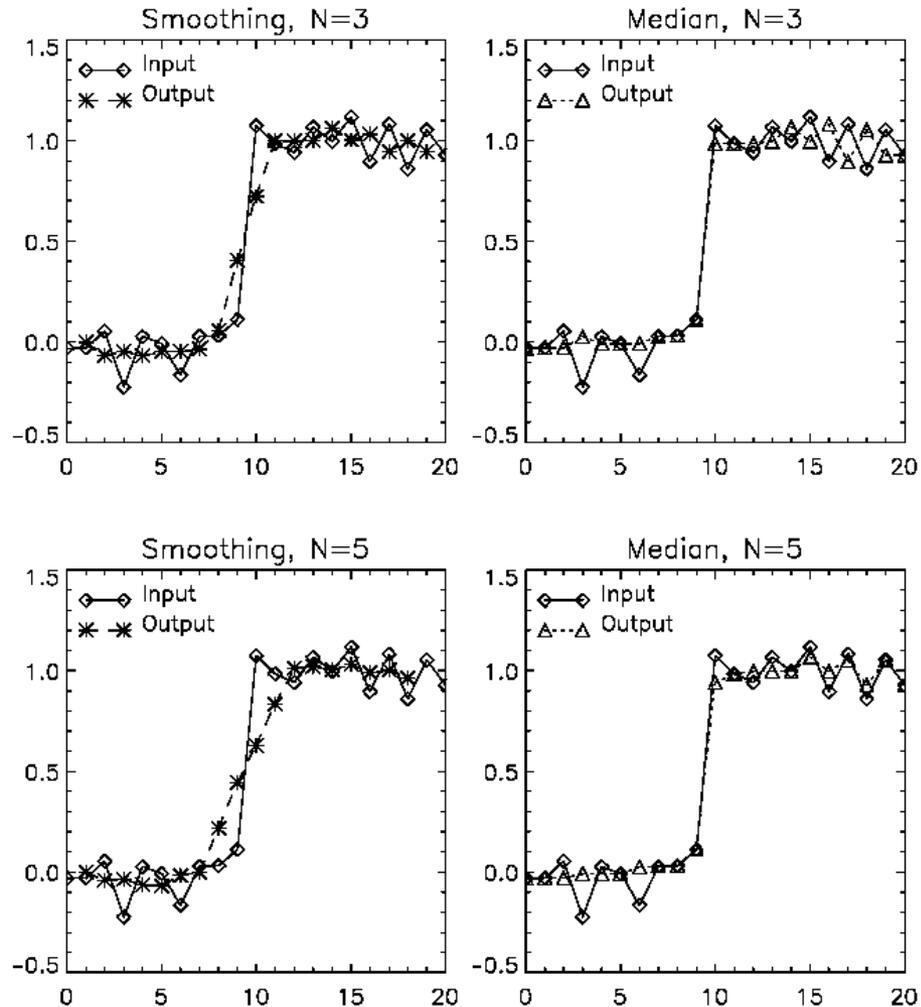

Median versus local averaging filter response around a local ridge edge

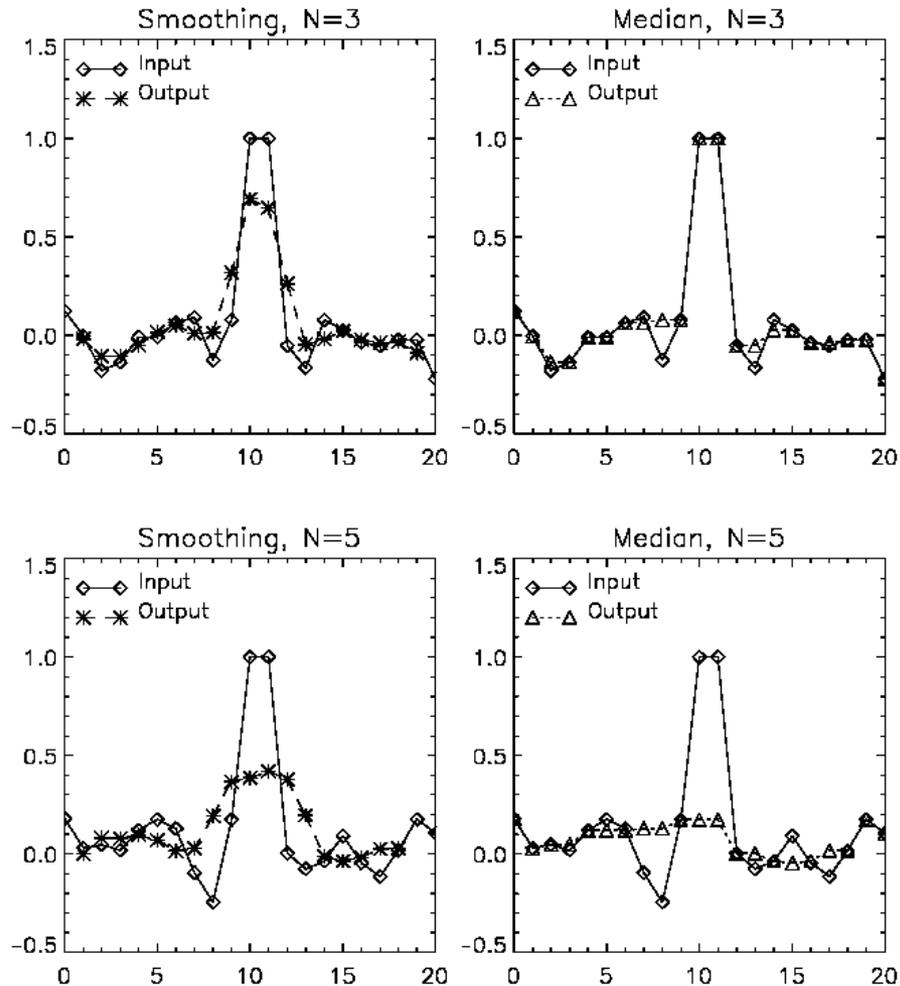

High pass filtering

- We use masks with positive coefficients around the centre of the mask and negative coefficients in the periphery.
- In the mask shown below the central coefficient is +8 and its 8 nearest neighbours are -1.
- The reversed signs are equally valid, i.e., -8 in the middle and +1 for the rest of the coefficients.
- The sum of the mask coefficients must be zero. This leads to the response of the mask within a constant (or slowly varying) intensity area being zero (or very small).

$$\frac{1}{9} \times \begin{array}{|c|c|c|} \hline -1 & -1 & -1 \\ \hline -1 & 8 & -1 \\ \hline -1 & -1 & -1 \\ \hline \end{array}$$

Example of high pass filtering

original
image

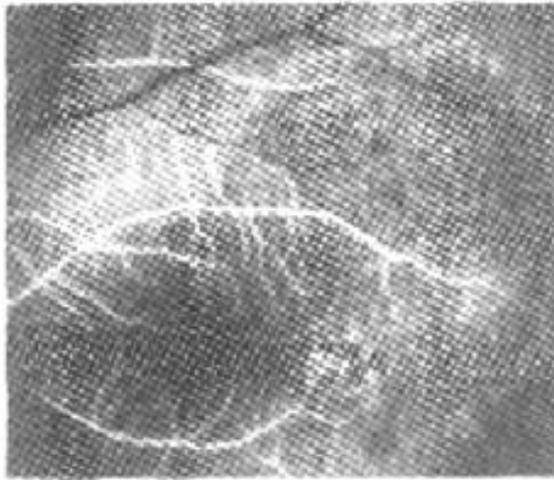


image filtered using
the 3x3 mask:
highlighting of edges,
but lower contrast



Example of high pass filtering



High pass filtered image



High pass filtered image with 10db noise

High boost filtering

- The goal of high boost filtering is to enhance the high frequency information without completely eliminating the background of the image.
- We know that:
$$(\text{High-pass filtered image}) = (\text{Original image}) - (\text{Low-pass filtered image})$$
- We define:
$$(\text{High boost filtered image}) = A \times (\text{Original image}) - (\text{Low-pass filtered image})$$
$$(\text{High boost}) = (A - 1) \times (\text{Original}) + (\text{Original}) - (\text{Low-pass})$$
$$(\text{High boost}) = (A - 1) \times (\text{Original}) + (\text{High-pass})$$
- As you can see, when $A > 1$, part of the original is added back to the high-pass filtered version of the image in order to partly restore the low frequency components that would have been eliminated with standard high-pass filtering.
- Typical values for A are values slightly higher than 1, as for example 1.15, 1.2, etc.


High boost filtering

- The resulting image looks similar to the original image with some edge enhancement.
- The spatial mask that implements the high boost filtering algorithm is shown below.
- The resulting image depends on the choice of A .

$$\frac{1}{9} \times \begin{array}{|c|c|c|} \hline -1 & -1 & -1 \\ \hline -1 & w = 9A - 1 & -1 \\ \hline -1 & -1 & -1 \\ \hline \end{array}$$

- High boost filtering is used in printing and publishing industry.

Example of high boost filtering

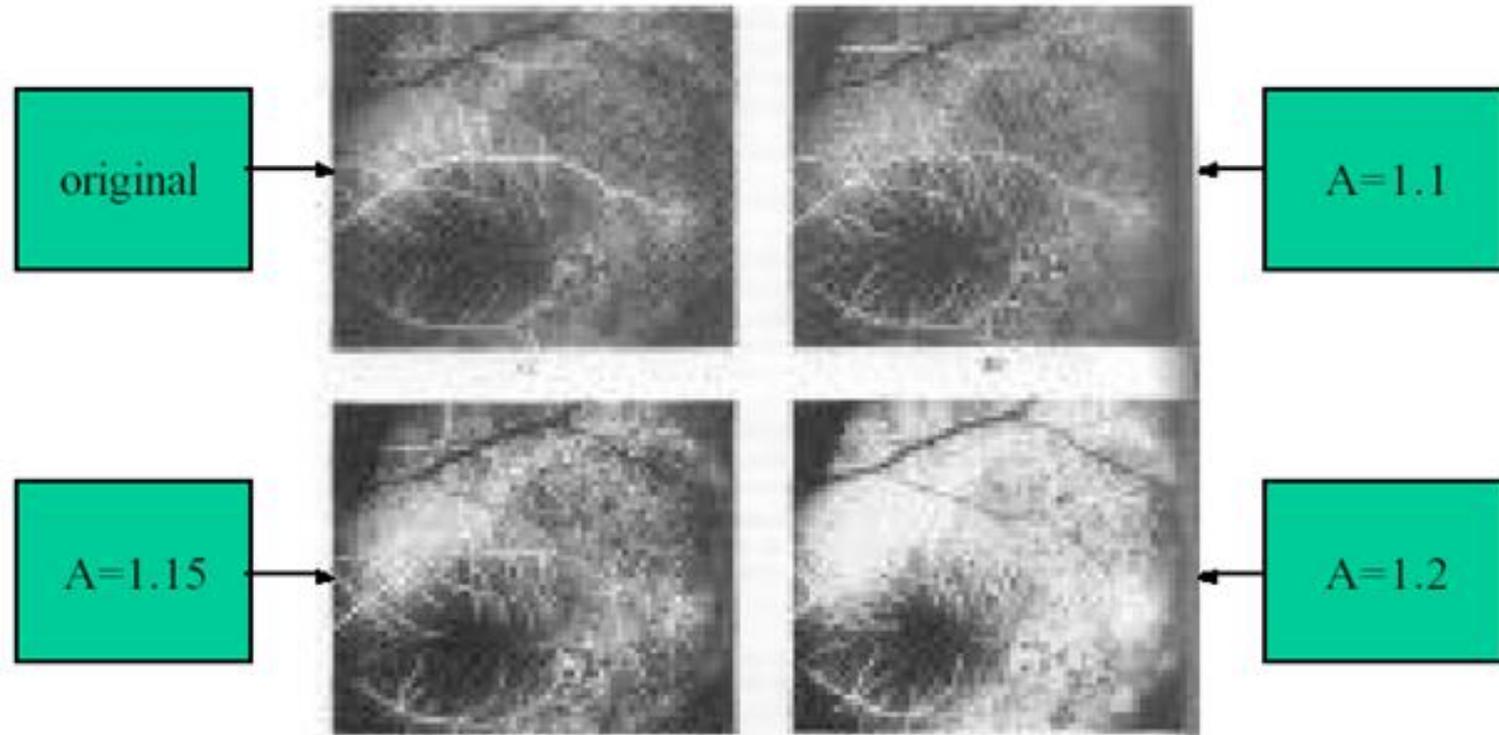

Example of high boost filtering



$A = 1.15$






$A = 1.2$



Edge detection

- Edges are abrupt local changes in the image value (for example grey level).
- Edges are of crucial important because they are related to the boundaries of the various objects present in the image.
- Object boundaries are key feature for object detection and identification.
- Edge information in an image is found by looking at the relationship a pixel has with its neighborhoods.
- If a pixel's grey-level value is similar to those around it, there is probably not an edge at that point.
- If a pixel's has neighbors with widely varying grey levels, it may present an edge point.

Abrupt versus gradual change in image intensity

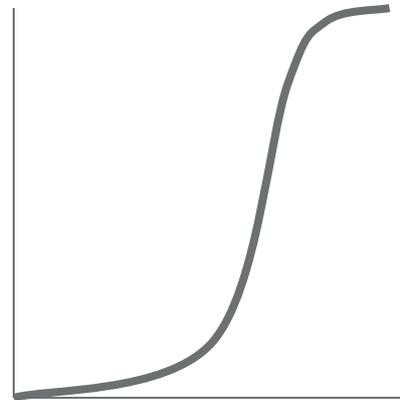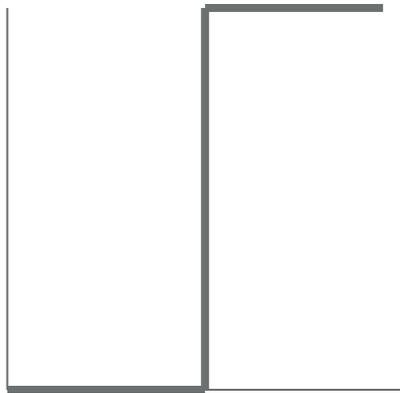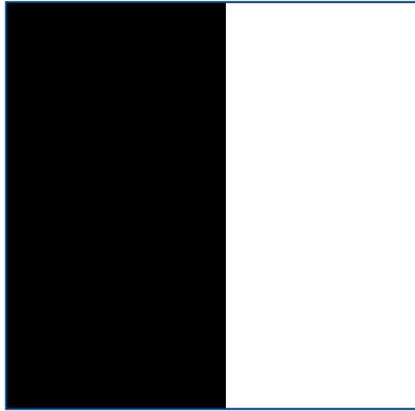


Type of edges

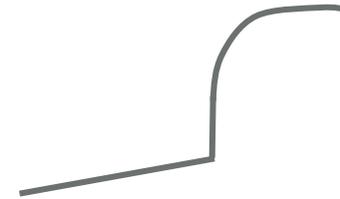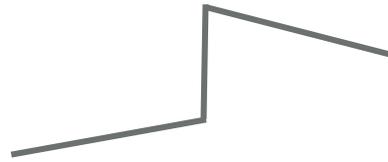

Step edges




Roof edge

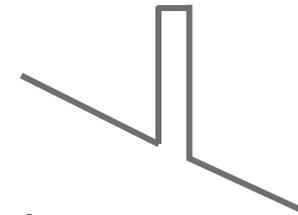

Line (ridge) edges

Edges are caused by a variety of factors (observe the irrelevant edges)

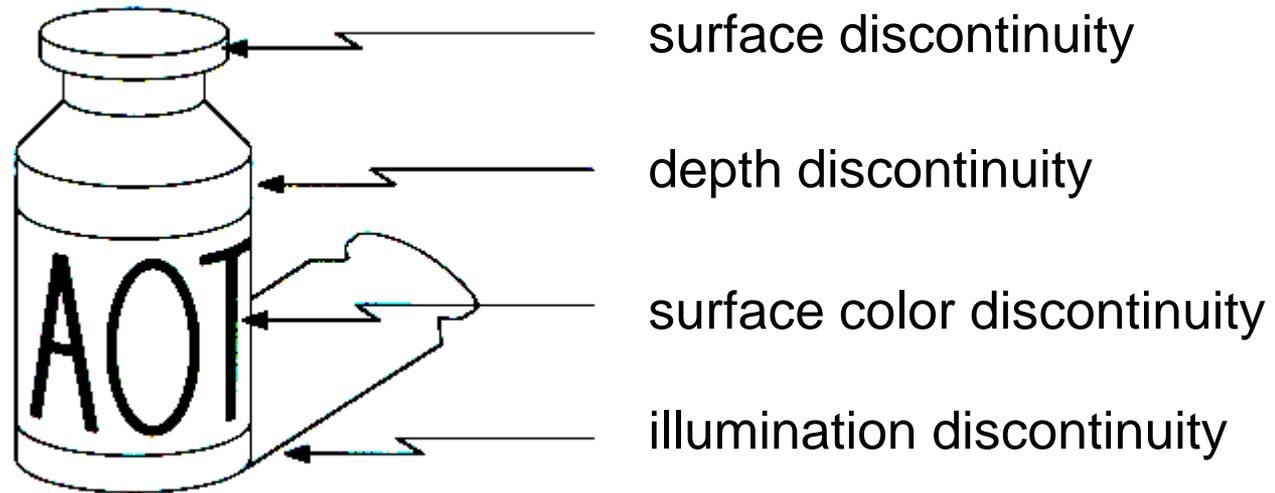

From a grey level image to an edge image (or edge map)






How do we detect the presence of a local edge?

- The gradient (first derivative) of the image around a pixel might give information about how detailed is the area around a pixel and whether there are abrupt intensity changes.
- The image is a 2-D signal and therefore, the gradient at a location (x, y) is a 2-D vector which contains the two partial derivatives of the image with respect to the coordinates x, y .

$$\nabla f = \begin{bmatrix} \frac{\partial f}{\partial x} \\ \frac{\partial f}{\partial y} \end{bmatrix}$$

- Edge strength is given by $\|\nabla f\| = \left[\left(\frac{\partial f}{\partial x} \right)^2 + \left(\frac{\partial f}{\partial y} \right)^2 \right]^{\frac{1}{2}}$ or $\|\nabla f\| \cong \left| \frac{\partial f}{\partial x} \right| + \left| \frac{\partial f}{\partial y} \right|$.
- Edge orientation is given by $\theta = \tan^{-1} \left(\frac{\partial f}{\partial y} / \frac{\partial f}{\partial x} \right)$.


Examples of edge orientations

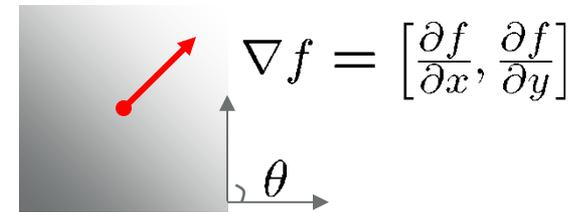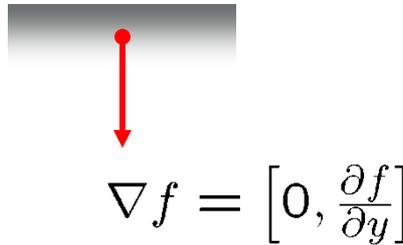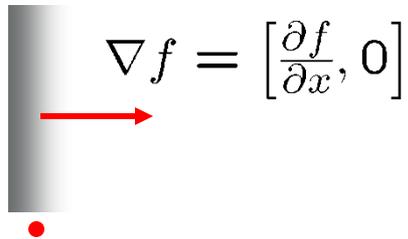

- Edge strength is given by $\|\nabla f\| = \left[\left(\frac{\partial f}{\partial x} \right)^2 + \left(\frac{\partial f}{\partial y} \right)^2 \right]^{\frac{1}{2}}$ or $\|\nabla f\| \cong \left| \frac{\partial f}{\partial x} \right| + \left| \frac{\partial f}{\partial y} \right|$.
- Edge orientation is given by $\theta = \tan^{-1} \left(\frac{\partial f}{\partial y} / \frac{\partial f}{\partial x} \right)$.

Spatial masks for edge detection

- Consider an image region of size 3×3 pixels. The coordinates x, y are shown.
- The quantity r denotes grey level values.
- The magnitude $\|\nabla f\| = \left| \frac{\partial f}{\partial x} \right| + \left| \frac{\partial f}{\partial y} \right|$ of the gradient at pixel with intensity r_5 can be approximated by:
 - differences along x and y
 $\|\nabla f\| = |r_5 - r_6| + |r_5 - r_8|$
 - cross-differences (along the two main diagonals)
 - $\|\nabla f\| = |r_6 - r_8| + |r_5 - r_9|$

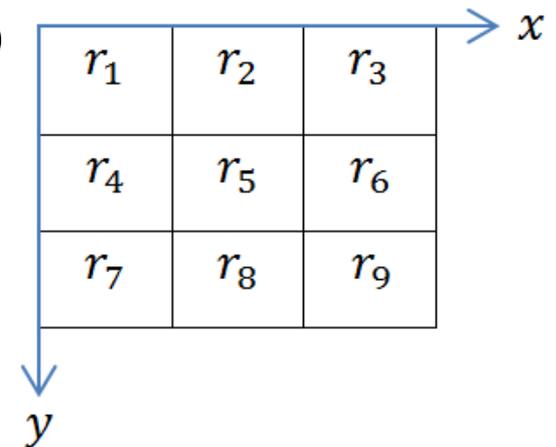

Spatial masks for edge detection – Roberts operator

- The magnitude $\|\nabla f\| = \left| \frac{\partial f}{\partial x} \right| + \left| \frac{\partial f}{\partial y} \right|$ of the gradient at pixel with intensity r_5 can be approximated by:
 - differences along x and y

$$\|\nabla f\| = |r_5 - r_6| + |r_5 - r_8|$$
 - cross-differences (along the two main diagonals)

$$\|\nabla f\| = |r_6 - r_8| + |r_5 - r_9|$$
- Each of the above approximation is the sum of the magnitudes of the responses of two masks. These sets of masks are the so called **Roberts operator**.

$$\text{abs}\left\{ \begin{array}{|c|c|c|} \hline 0 & 0 & 0 \\ \hline 0 & 1 & 0 \\ \hline 0 & -1 & 0 \\ \hline \end{array} \right\} + \text{abs}\left\{ \begin{array}{|c|c|c|} \hline 0 & 0 & 0 \\ \hline 0 & 1 & -1 \\ \hline 0 & 0 & 0 \\ \hline \end{array} \right\} \quad \text{abs}\left\{ \begin{array}{|c|c|c|} \hline 0 & 0 & 0 \\ \hline 0 & 0 & 1 \\ \hline 0 & -1 & 0 \\ \hline \end{array} \right\} + \text{abs}\left\{ \begin{array}{|c|c|c|} \hline 0 & 0 & 0 \\ \hline 0 & 1 & 0 \\ \hline 0 & 0 & -1 \\ \hline \end{array} \right\}$$

Spatial masks for edge detection – Prewitt and Sobel operators


- The magnitude $\|\nabla f\| = \left| \frac{\partial f}{\partial x} \right| + \left| \frac{\partial f}{\partial y} \right|$ of the gradient at pixel with intensity r_5 can be also approximated by involving more pixels:
 - Roberts operator

$$\|\nabla f\| = |(r_3 + r_6 + r_9) - (r_1 + r_4 + r_7)| + |(r_7 + r_8 + r_9) - (r_1 + r_2 + r_3)|$$
 - Sobel operator


$$\|\nabla f\| = |(r_3 + 2r_6 + r_9) - (r_1 + 2r_4 + r_7)| + |(r_7 + 2r_8 + r_9) - (r_1 + 2r_2 + r_3)|$$
- Each of the above approximation is the sum of the magnitudes of the responses of two masks.

$$\text{abs}\left\{ \begin{array}{|c|c|c|} \hline -1 & 0 & 1 \\ \hline -1 & 0 & 1 \\ \hline -1 & 0 & 1 \\ \hline \end{array} \right\} + \text{abs}\left\{ \begin{array}{|c|c|c|} \hline -1 & -1 & -1 \\ \hline 0 & 0 & 0 \\ \hline 1 & 1 & 1 \\ \hline \end{array} \right\} \quad \text{abs}\left\{ \begin{array}{|c|c|c|} \hline -1 & -2 & -1 \\ \hline 0 & 0 & 0 \\ \hline 1 & 2 & 1 \\ \hline \end{array} \right\} + \text{abs}\left\{ \begin{array}{|c|c|c|} \hline -1 & 0 & 1 \\ \hline -2 & 0 & 2 \\ \hline -1 & 0 & 1 \\ \hline \end{array} \right\}$$


Example of edge detection using Prewitt

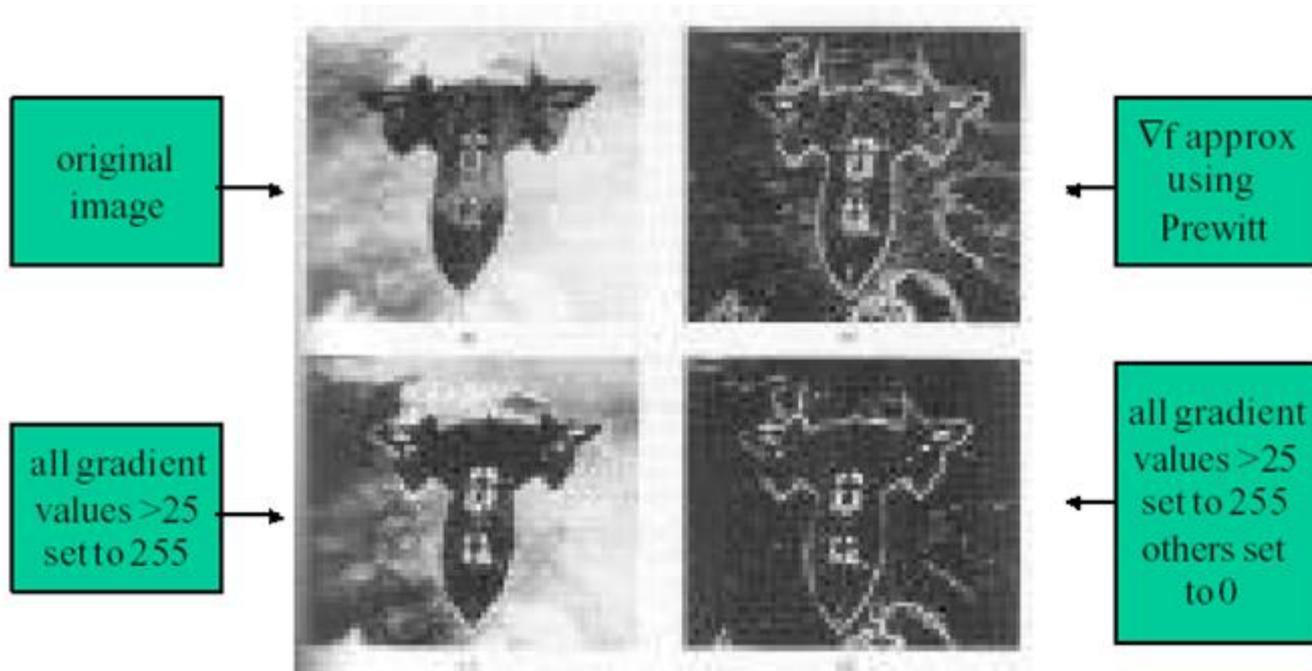


Original image and its histogram

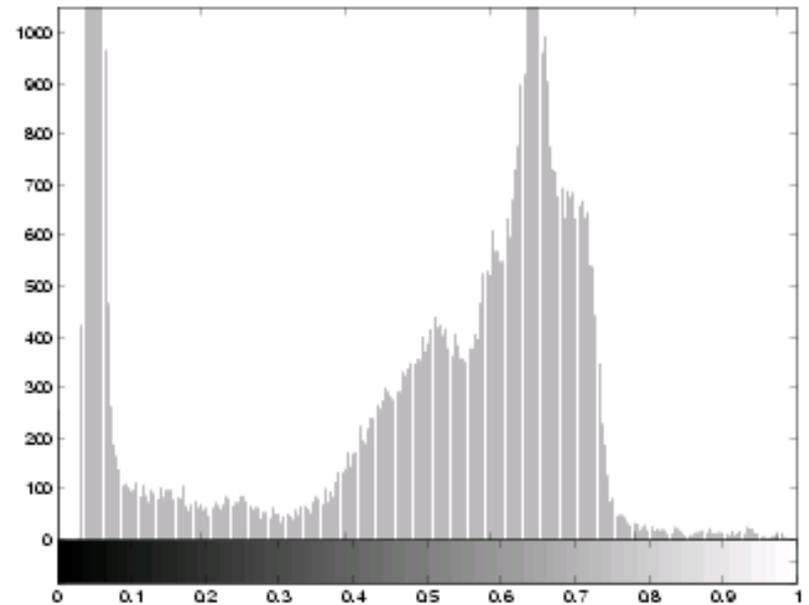

Example of edge detection using Prewitt

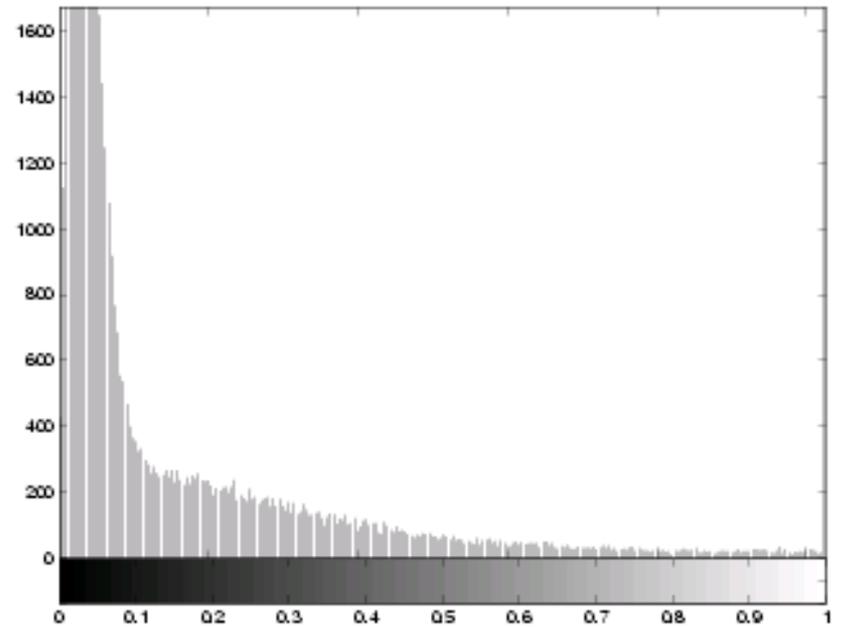

Example of edge detection using Sobel

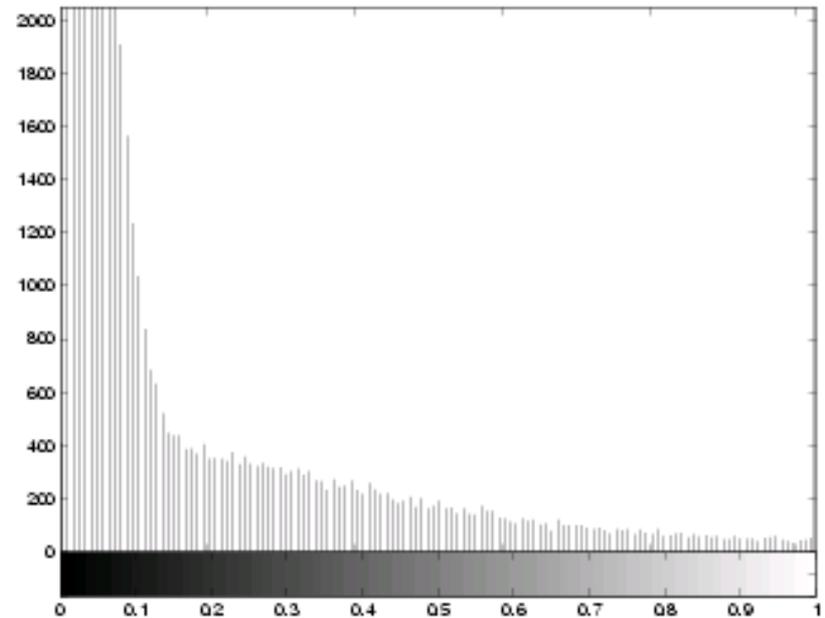

Edge detection using second order gradient: Laplacian mask

- The second order gradient gives also information about how detailed is the area around a pixel.
- It is defined as:

$$\nabla^2 f = \frac{\partial^2 f}{\partial x^2} + \frac{\partial^2 f}{\partial y^2}$$

- A mask that can approximate the above function is the Laplacian:

$$\nabla^2 f \cong 4r_5 - (r_2 + r_4 + r_6 + r_8)$$

